
UW9898 Saddle

Profile specification · milled to this sheet · Rev A · 10/09/2026

A saddle: a solid, low-crowned threshold over the seam between two fastened-down floors of the same height.

DIMENSIONED SECTION · AS INSTALLED, FLOOR DOWN · ENLARGED ABOUT 2.4× · UNITS: INCHES

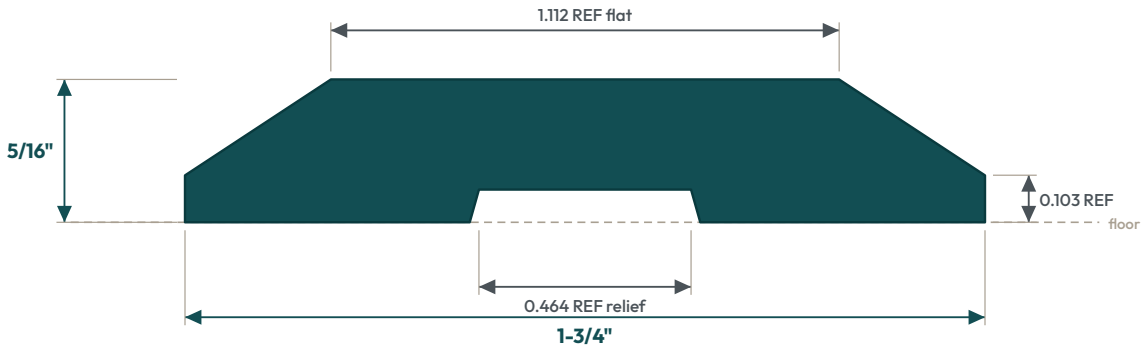

BOLD TEAL = HELD TO ±1/64" · GREY REF = REFERENCE SHAPE, THE SECTION GOVERNS

CORRECT THE RUN

The stocked sticks measure 0.290" high. Mill the next run to this sheet: 5/16" high.


SIZE	1-3/4" × 5/16" · 12' stock · sold by the linear foot
PART NUMBERS	Red Oak UW9898RO · White Oak UW9898WO
HELD DIMENSIONS	Width 1-3/4", height 5/16" — ±1/64".
REFERENCE SHAPE	Everything marked REF is the scanned profile's own shape, re-scaled to the held sizes; the section governs.
GRADE	Select & Better — clear walking face. Character grade on request to match the floor.
MOISTURE	Kiln-dried and conditioned to 6–8% MC to match the flooring, checked before moulding.
GAUGE	Run to the UWP acrylic gauge for UW9898 — first article plus in-run QC every lot.

Full-Scale Template

UW9898 Saddle · 1:1 · Rev A · 10/09/2026

PRINT AT 100%

Set the print dialog to Actual Size / 100% and turn off Fit to Page; the check bar must read exactly 3". Stand a cut end of the first article on the outline: it should cover it with no daylight at the drop or the top.





UW9898 · 1.750" × 0.313" · ACTUAL SIZE, FLOOR DOWN