

UW9894 Low-Slope Overlap Reducer *Profile*

0.750" × 2.000"

Milled to the UWP gauge. The dimensioned section, species, and part numbers below govern every run — first article and every run after. All tolerances ± 0.0156". Reduces a 1/2" nominal floor to the subfloor.

DIMENSIONED SECTION — LIP LEFT, AS MACHINED · UNITS: INCHES

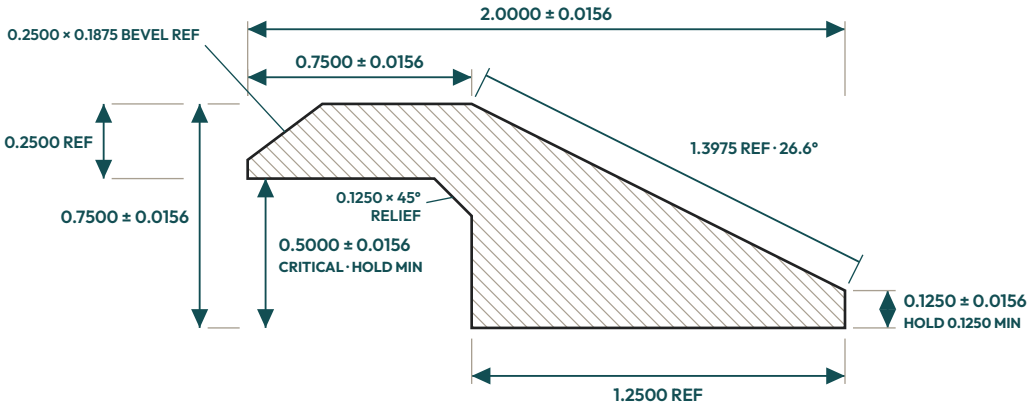



ISOMETRIC · LIP TOWARD VIEWER

ALL TOLERANCES ± 0.0156"

Drop 0.5000" is the critical check — hold 0.5000" minimum so a 1/2" floor slides under the lip. Toe held at 0.1250" minimum. Ramp face 1.3975" at 26.6° is a reference derived from the run and rise. Nose bevel is reference, pending shop confirmation.

PROFILE	Low-Slope Overlap Reducer · 1/2" drop
SIZE	0.750" × 2.000" · 3/4" × 2" nominal · 12' stock · sold by the linear foot
PART NUMBERS	Red Oak UW9894RO · White Oak UW9894WO · Hickory UW9894HK · Maple UW9894MP
MACHINED DETAIL	Lip 0.7500 W × 0.2500 T · drop 0.5000 (critical, hold min) · ramp 1.2500 run, 0.6250 rise, 1:2.00 · toe 0.1250 (hold min) · nose bevel 0.2500 × 0.1875 ref · rebate relief 0.1250 × 45° in the inside corner · all milled dimensions ± 0.0156"
ACCESSIBILITY	Not ADA compliant — top of lip 3/4" above the lower floor; ramp 1:2.00. Not for an accessible route.
GRADE	Select & Better — clear walking face and ramp. Character grade on request to match the floor.
KNOTS & CHARACTER	None on the walking face, ramp, or nose. Sound pin knots up to 1/8" permitted on the underside only. No open holes, loose knots, or splits.
COLOR RANGE	Natural color range for the species; kept consistent within a run against the approved sample and the flooring it reduces to.
MOISTURE	Kiln-dried & conditioned to 6–8% MC to match the flooring, checked before molding.
GAUGE / TOLERANCE	Run to the UWP gauge, ± 0.0156" on every dimensioned surface — first-article + in-run QC every lot. Drop and toe are held to minimum, never under.

Unique Wood Products · NW Houston / Tanner Rd · 9915 Tanner Road, Houston TX 77041 · 713.462.5045

UNIQUE
WOOD PRODUCTS


MOULDING · STAIR PARTS · MILLWORK


UW9890 Low-Slope Overlap Reducer *Profile*

1.000" × 2.000"

Milled to the UWP gauge. The dimensioned section, species, and part numbers below govern every run — first article and every run after. All tolerances ± 0.0156". Reduces a 3/4" nominal floor to the subfloor.

DIMENSIONED SECTION — LIP LEFT, AS MACHINED · UNITS: INCHES

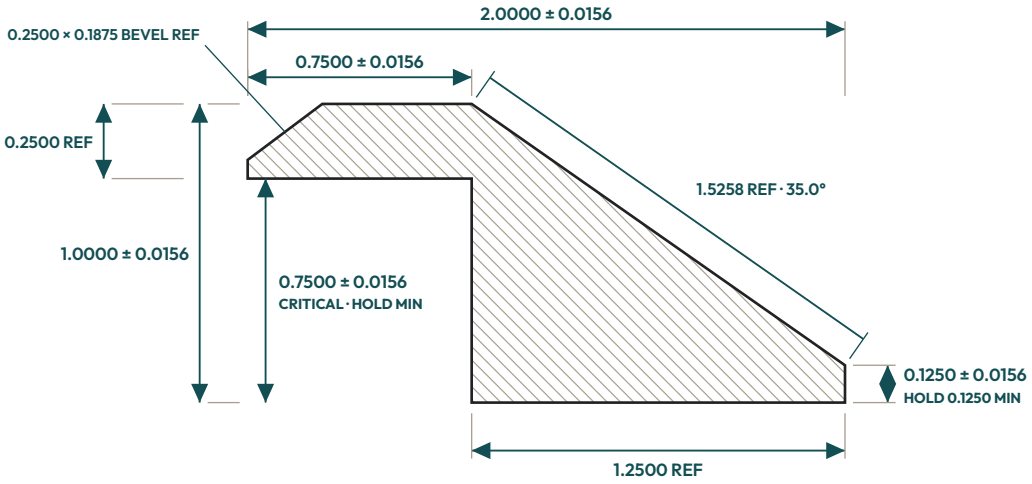



ISOMETRIC · LIP TOWARD VIEWER

ALL TOLERANCES ± 0.0156"

Drop 0.7500" is the critical check — hold 0.7500" minimum so a 3/4" floor slides under the lip. Toe held at 0.1250" minimum. Ramp face 1.5258" at 35.0° is a reference derived from the run and rise. Nose bevel is reference, pending shop confirmation.

PROFILE	Low-Slope Overlap Reducer · 3/4" drop
SIZE	1.000" × 2.000" · 1" × 2" nominal · 12' stock · sold by the linear foot
PART NUMBERS	Red Oak UW9890RO · White Oak UW9890WO · Hickory UW9890HK · Maple UW9890MP
MACHINED DETAIL	Lip 0.7500 W × 0.2500 T · drop 0.7500 (critical, hold min) · ramp 1.2500 run, 0.8750 rise, 1:1.43 · toe 0.1250 (hold min) · nose bevel 0.2500 × 0.1875 ref · all milled dimensions ± 0.0156"
ACCESSIBILITY	Not ADA compliant — top of lip 1" above the lower floor; ramp 1:1.43. Not for an accessible route.
GRADE	Select & Better — clear walking face and ramp. Character grade on request to match the floor.
KNOTS & CHARACTER	None on the walking face, ramp, or nose. Sound pin knots up to 1/8" permitted on the underside only. No open holes, loose knots, or splits.
COLOR RANGE	Natural color range for the species; kept consistent within a run against the approved sample and the flooring it reduces to.
MOISTURE	Kiln-dried & conditioned to 6–8% MC to match the flooring, checked before molding.
GAUGE / TOLERANCE	Run to the UWP gauge, ± 0.0156" on every dimensioned surface — first-article + in-run QC every lot. Drop and toe are held to minimum, never under.

Unique Wood Products · NW Houston / Tanner Rd · 9915 Tanner Road, Houston TX 77041 · 713.462.5045