
# UW9892 Baby Threshold

Profile specification · milled to this sheet · Rev A · 10/09/2026

A baby threshold: the lip rides on the finished floor and covers its cut edge; the body bears on the subfloor and ends the floor at a door, slider track, or lower surface.

DIMENSIONED SECTION · AS INSTALLED, FLOOR DOWN · ENLARGED ABOUT 2.4× · UNITS: INCHES

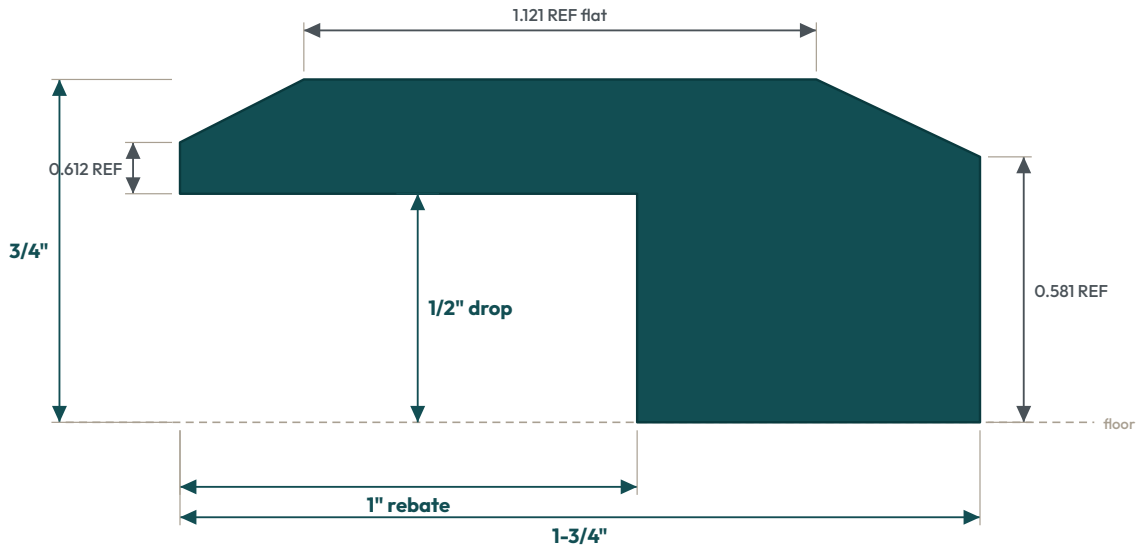


BOLD TEAL = HELD TO ±1/64" · GREY REF = REFERENCE SHAPE, THE SECTION GOVERNS

**CORRECT THE RUN**

The stocked sticks measure 0.729" high with a 3/8" (0.379") drop and a 1.039" rebate. Mill the next run to this sheet: 3/4" high, 1/2" drop, 1" rebate.


| | |
|---|---|
| **SIZE** | 1-3/4" × 3/4" · 1/2" drop × 1" rebate under the lip · 12' stock · sold by the linear foot |
| **PART NUMBERS** | Red Oak UW9892RO · White Oak UW9892WO |
| **HELD DIMENSIONS** | Width 1-3/4", height 3/4", drop 1/2", rebate 1" — ±1/64". Drop is the critical check: a 1/2" floor must slide fully under the lip. |
| **REFERENCE SHAPE** | Everything marked REF is the scanned profile's own shape, re-scaled to the held sizes; the section governs. |
| **GRADE** | Select & Better — clear walking face. Character grade on request to match the floor. |
| **MOISTURE** | Kiln-dried and conditioned to 6–8% MC to match the flooring, checked before moulding. |
| **GAUGE** | Run to the UWP acrylic gauge for UW9892 — first article plus in-run QC every lot. |

# Full-Scale Template

UW9892 Baby Threshold · 1:1 · Rev A · 10/09/2026

**PRINT AT 100%**

Set the print dialog to Actual Size / 100% and turn off Fit to Page; the check bar must read exactly 3". Stand a cut end of the first article on the outline: it should cover it with no daylight at the drop or the top.






UW9892 · 1.750" × 0.750" · ACTUAL SIZE, FLOOR DOWN