
UW9893 Mini Overlap Reducer

Profile specification · milled to this sheet · Rev A · 10/09/2026

A mini overlap reducer: the lip rides on the higher floor and covers its cut edge; the ramp runs down to the lower floor.

DIMENSIONED SECTION · AS INSTALLED, FLOOR DOWN · ENLARGED ABOUT 2.6× · UNITS: INCHES

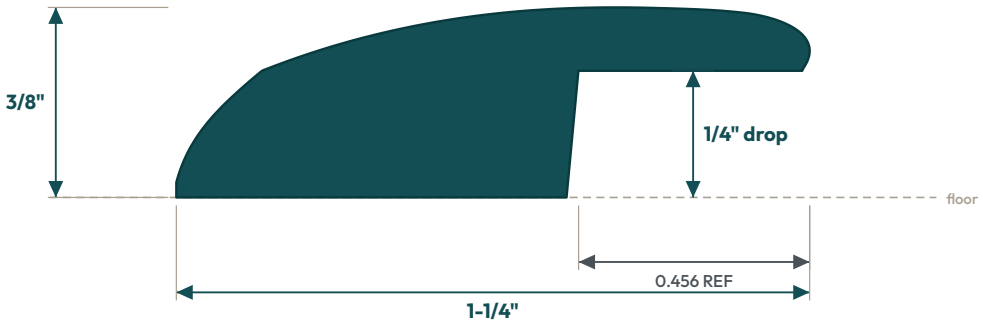

BOLD TEAL = HELD TO ±1/64" · GREY REF = REFERENCE SHAPE, THE SECTION GOVERNS

CORRECT THE RUN

The stocked sticks were milled wrong (0.376" high with a 0.184" drop). Mill the next run to this sheet: 3/8" high, 1/4" drop. The lip finishes 1/8" thick — handle the stock with care at the nose.


SIZE	1-1/4" × 3/8" · 1/4" drop under the lip · 12' stock · sold by the linear foot
PART NUMBERS	Red Oak UW9893RO · White Oak UW9893WO · Hickory UW9893HK · Maple UW9893MP
HELD DIMENSIONS	Width 1-1/4", height 3/8", drop 1/4" — ±1/64". Drop is the critical check: a 1/4" floor must slide fully under the lip.
REFERENCE SHAPE	Everything marked REF is the scanned profile's own shape, re-scaled to the held sizes; the section governs.
GRADE	Select & Better — clear walking face. Character grade on request to match the floor.
MOISTURE	Kiln-dried and conditioned to 6–8% MC to match the flooring, checked before moulding.
GAUGE	Run to the UWP acrylic gauge for UW9893 — first article plus in-run QC every lot.

Full-Scale Template

UW9893 Mini Overlap Reducer · 1:1 · Rev A · 10/09/2026

PRINT AT 100%

Set the print dialog to Actual Size / 100% and turn off Fit to Page; the check bar must read exactly 3". Stand a cut end of the first article on the outline: it should cover it with no daylight at the drop or the top.





UW9893 · 1.250" × 0.375" · ACTUAL SIZE, FLOOR DOWN