
UW9895 Mini T-Moulding

Profile specification · milled to this sheet · Rev A · 10/09/2026

A mini T-moulding: a domed cap over a center stem. The stem drops into the gap between two same-height floating floors so both can move while the cap hides the gap.

DIMENSIONED SECTION · AS INSTALLED, FLOOR DOWN · ENLARGED ABOUT 2.6× · UNITS: INCHES

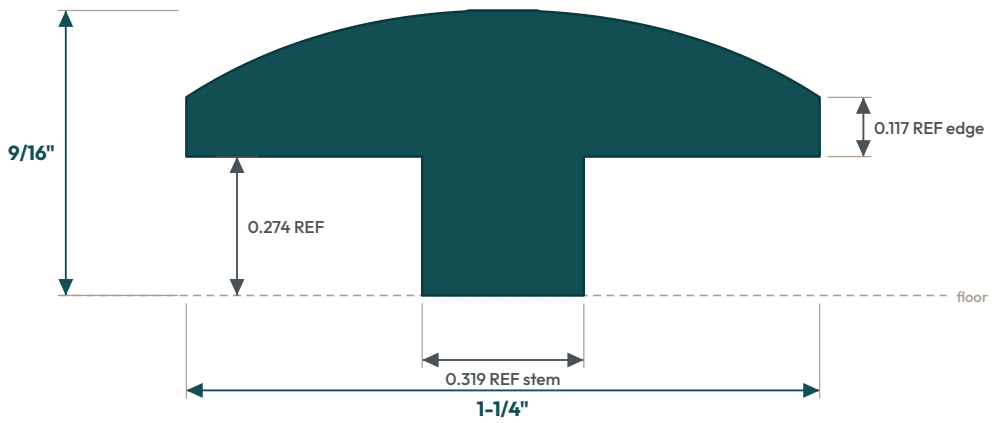

BOLD TEAL = HELD TO ±1/64" · GREY REF = REFERENCE SHAPE, THE SECTION GOVERNS

CORRECT THE RUN

The stocked sticks measure 0.525" high with a rounded stem foot. Mill the next run to this sheet: 9/16" high, stem bottom square (no radius).


SIZE	1-1/4" × 9/16" · 12' stock · sold by the linear foot
PART NUMBERS	Red Oak UW9895RO · White Oak UW9895WO · Hickory UW9895HK · Maple UW9895MP
HELD DIMENSIONS	Width 1-1/4", height 9/16" — ±1/64". Stem width is the check that matters on site: it has to drop into the floor gap.
REFERENCE SHAPE	Everything marked REF is the scanned profile's own shape, re-scaled to the held sizes; the section governs.
GRADE	Select & Better — clear walking face. Character grade on request to match the floor.
MOISTURE	Kiln-dried and conditioned to 6–8% MC to match the flooring, checked before moulding.
GAUGE	Run to the UWP acrylic gauge for UW9895 — first article plus in-run QC every lot.


Full-Scale Template

UW9895 Mini T-Moulding · 1:1 · Rev A · 10/09/2026

PRINT AT 100%

Set the print dialog to Actual Size / 100% and turn off Fit to Page; the check bar must read exactly 3". Stand a cut end of the first article on the outline: it should cover it with no daylight at the drop or the top.





UW9895 · 1.250" × 0.563" · ACTUAL SIZE, FLOOR DOWN